



# IMPRESSIVE DESIGNS THAT AWAKEN THE SENSES

## TECAM CHILLED WATER FAN COIL LINE

### Specialized Line: Residential and Commercial Sector

Impressive designs that complement any space. Crafted with carefully selected materials to meet technical and aesthetic standards, providing confidence and security for the applications they are installed in.

#### Range of Applications:

- Offices
- Hotels
- Hospitals
- Commercial Premises
- Universities

**4FRCW**




**4AFC\_CA**




**4AFC**



**4FRW**

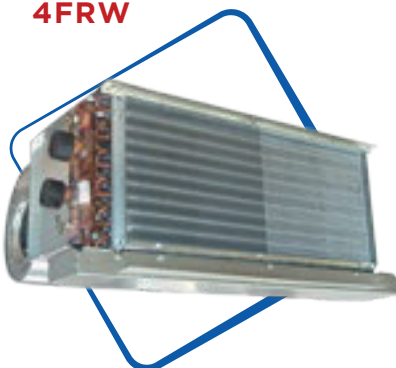

**4FRC**

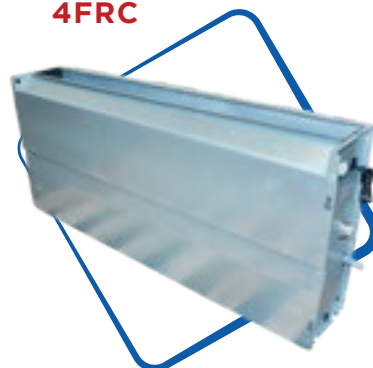

Air  
Conditioning



Ventilation  
and filtration



Heat



Humidity  
control



## Main Characteristics:

### 4FRW

- Chilled Water Fan Coil Unit
- Suitable for False Ceiling and Duct Applications
- Forward-Curved Fan Wheel
- 3-Speed Direct Drive Motor
- AHRI-Certified Coil
- Steel and Galvanized Sheet Construction

### 4FRCW

- Chilled Water Fan Coil Unit
- Ducted Installation
- Horizontal or Vertical Operation
- 3-Speed Direct Drive Motor
- AHRI-Certified Coil
- Structure Covered with Electrostatic Paint

### 4AFC

- Luxury Chilled Water Fan Coil
- High Wall Installation
- Remote Control
- Silent Operation
- Modulating Air Supply
- High-Impact Polymer Cabinet

### 4AFC\_CA

- Chilled Water Cassette Fan Coil
- False Ceiling Installation
- Remote Control
- High-Impact Polymer Panel
- Built-in Drainage Pump
- Silent Operation


### 4FRC

- Bare Chilled Water Fan Coil
- False Ceiling Application
- Free Discharge
- Forward-Curved Fan Wheels
- 3-Speed Direct Drive Motor
- Steel and Galvanized Sheet Construction

## Technical references and specifications:


### 4FRW

MODEL	VOLTS	MBTUH	CFM	DIMENSIONS		
				A	B	C
<b>02</b>	220	24	900	30.7	23	13.2
<b>04</b>	220	36	1350	41.9	23	12.5
<b>05</b>	220	48	1800	61.8	23	13.2

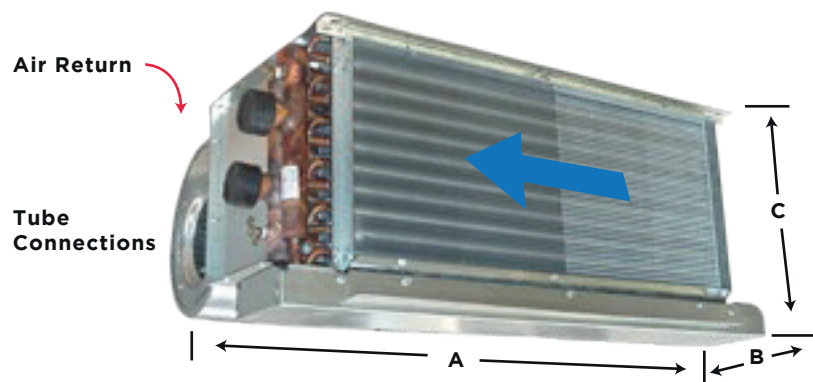


## 4FRCW

MODEL	VOLTS	MBTUH	CFM	DIMENSIONS		
				A	B	C
24	220	24	750	22.3	23.3	45.8
36	220	36	1500	22.3	23.3	45.8
48	220	48	2000	22.3	26.2	53.9
60	220	60	2200	22.3	26.2	53.9

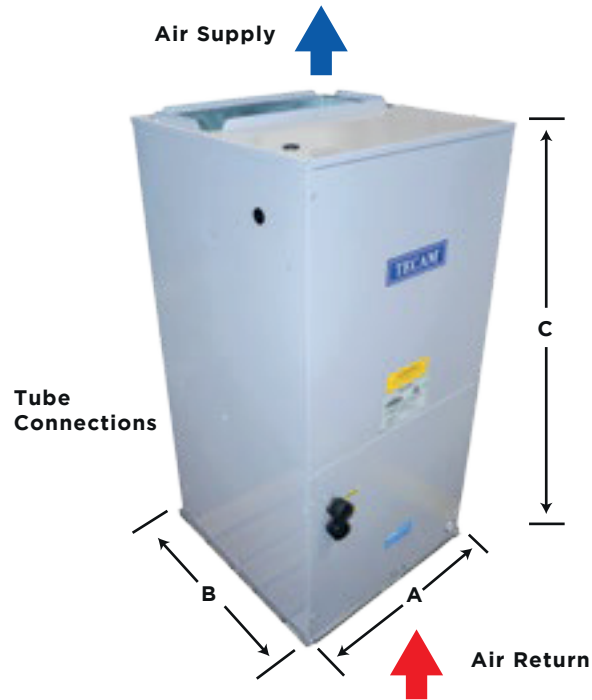

## 4AFC

MODEL	VOLTS	MBTUH	CFM	DIMENSIONS		
				A	B	C
4AFC 51W	1Ph - 220V	9.2	300	31.3	8.46	11.2
4AFC 68W	1Ph - 220V	12.3	400	39.0	9.1	13.0
4AFC 85W	1Ph - 220V	15.3	500	39.0	9.1	13.0
4AFC 102W	1Ph - 220V	18.4	600	39.0	9.1	13.0


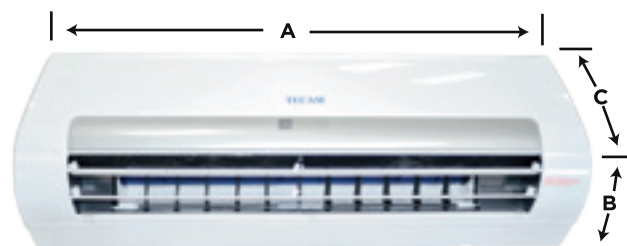


## 4AFC

MODEL	VOLTS	MBTUH	CFM	DIMENSIONS					
				A	B	C	D	E	F
<b>4AFC 051 CA</b>	1Ph - 220V	10.3	300	24.2	24.2	10.4	25.6	25.6	2.2
<b>4AFC 068 CA</b>	1Ph - 220V	12.6	400	24.2	24.2	10.4	25.6	25.6	2.2
<b>4AFC 085 CA</b>	1Ph - 220V	15.4	500	24.2	24.2	10.4	25.6	25.6	2.2
<b>4AFC 102 CA</b>	1Ph - 220V	19.5	600	32.9	32.9	9.4	37.4	37.4	2.2
<b>4AFC 136 CA</b>	1Ph - 220V	24.8	850	32.9	32.9	9.4	37.4	37.4	2.2
<b>4AFC 170 CA</b>	1Ph - 220V	28.0	950	32.9	32.9	9.4	37.4	37.4	2.2
<b>4AFC 204 CA</b>	1Ph - 220V	35.5	1200	32.9	32.9	9.4	37.4	37.4	2.2
<b>4AFC 238 CA</b>	1Ph - 220V	44.0	1500	32.9	32.9	9.4	37.4	37.4 </td <td>2.2</td>	2.2

## 4FRC

MODEL	CONNECTION	VOLTS	MBTUH	CFM	DIMENSIONS		
					A	B	C
<b>4FRC 03</b>	L - R	1Ph - 220V	9.2	300	32.7	20.8	9.5
<b>4FRC 04</b>	L - R	1Ph - 220V	12.3	400	36.6	20.8	9.5
<b>4FRC 05</b>	L - R	1Ph - 220V	15.4	500	40.6	20.8	9.5
<b>4FRC 06</b>	L - R	1Ph - 220V	18.5	600	45.9	20.8	9.5
<b>4FRC 08</b>	L - R	1Ph - 220V	24.6	800	53.3	20.8	9.5
<b>4FRC 10</b>	L - R	1Ph - 220V	30.8	1000	61.2	20.8	9.5
<b>4FRC 12</b>	L - R	1Ph - 220V	38.9	1200	69.1	20.8	9.5

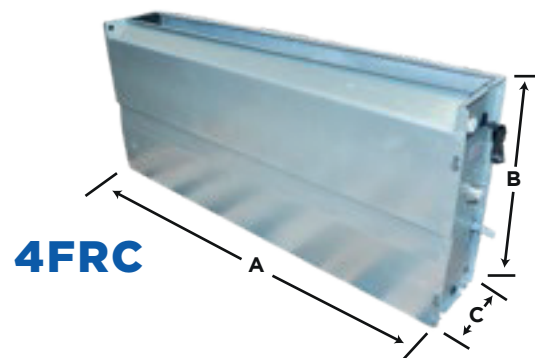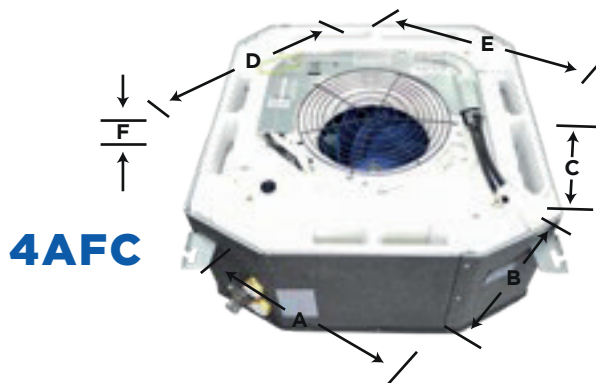

[www.tecam-sa.com](http://www.tecam-sa.com)

**CALI:** CEL. 316 833 2972 / 318 366 2174 / 316 471 9755  
**BOGOTÁ:** CEL. 311 794 5345 / 318 347 6029 / 316 834 6030  
**BARRANQUILLA:** CEL. 316 834 6027 / 318 358 7002  
**MEDELLÍN:** CEL. 318 366 2444 / 318 366 2168

**GUAYAQUIL, ECUADOR:**  
 TEL. (593) 099 287 1409 / 099 304 8253 CEL. (57) 316 833 2981  
**PANAMÁ, PANAMÁ:** CEL. (57) 316 833 2981  
**LIMA, PERU:**  
 TEL: (+511) 760 5965 / (51) 923 627 254 CEL. (57) 316 833 2981



Air Conditioning



Ventilation and filtration



Heat



Humidity control



**TECAM**  
Tecnología Ambiental

ENERGY SAVING AND PRESERVATION - TECAM GUARANTEE AND SUPPORT - QUICKEST DELIVERY TIMES